

# ARA

## Connection kit for cleaning unit MRA


This option includes the installation of ball valves on the frame of the reverse osmosis unit. This makes it easy to connect the optionally available manual cleaning unit MRA. This option is recommended if regular cleaning of the membranes is to be expected.

### BENEFITS

- Assembly ex works
- Easy connection of MRA
- Easy operation

### APPLICATIONS

- Recommended when antiscalant is used or unit is operated with problematic feed water
- Already included with the UO-S7 KR/FU, UO-D AS/FU and UO-D BW/FU series
- Available as an option for the UO-D (FU, CD) and UP-S7 FU series (from unit size 4,100 on)

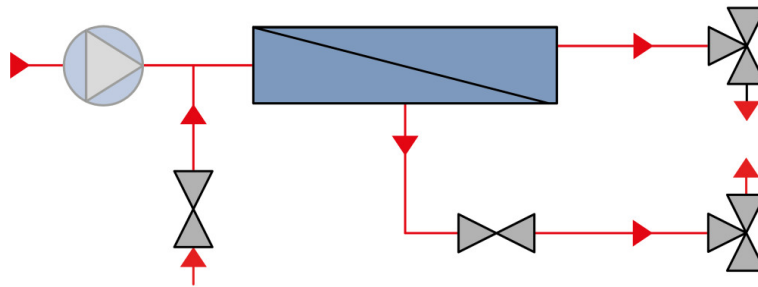

Schematic drawing ARA

### CONDITIONS OF USE

The ARA option has to be ordered together with the reverse osmosis unit.

# ARA

## Connection kit for cleaning unit MRA

### TECHNICAL DATA OF SERIES

Product name	Compatible with	Item number
ARA DN 15	UO-D 600 - 2,000 (FU, CD)	383 321
ARA DN 25	UO-D 2,500 - 3,500 FU	382 113
ARA DN 32	UO-D 4,300 - 5,400 FU, UP-S7 4,100 FU	382 114
ARA DN 40	UO-D 7,000 - 10,000 FU, UP-S7 6,000 - 8,200 FU	382 122
ARA DN 50/1	UO-D 12,000 FU, UP-S7 12,500 FU	382 138
ARA DN 65	UP-S7 20,000 FU	382 471